

# JARRETT TD SERIES TRAILING DISC CULTIVATOR\*



The TD2424 (24 disc) trailing disc cultivator (side view)



The TD2424 (24 disc) trailing disc cultivator (rear view)

## Main features


- Robust design with built-in weight
- Cast disc spacers to add weight
- Frame construction: twin angle steel, 100x100x12mm
- Frame length: 3.35m
- 38mm square, high strength, S1045 grade steel axles
- 2 x 15x7 steel wheel rims
- 2 x 9.5x15 multi-rib, agricultural tyres
- Wheel lift hydraulic cylinder: 300x75mm Alford Blackline with hoses

## Gang assembly

- Frame beams: angle steel, 100x100x12mm
- Discs: 610x6mm, scalloped
- Spacers: 235mm, 1-piece cast, machined ends
- Self-aligning, triple sealed ball bearings, mounted inside a spherically machined cast housing
- Bearing hanger: 16mm plate

## Options

- Trash scrapers: 50x16mm flat bar and 75x75x10mm angle bar
- 660x6mm scalloped discs
- Hydraulic levelling kit

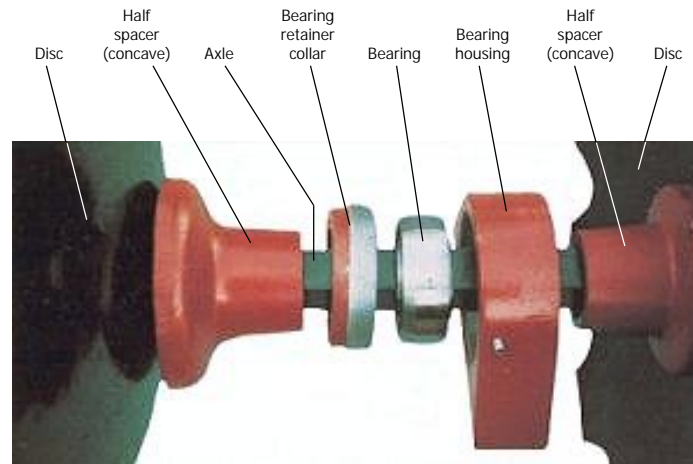

Exploded view of disc cultivator bearings

## Specifications

Model	Discs	Weight	Cut	Min pwr
TD1624	16	1,600 kg	1.8 m	65 hp
TD1824	18	1,700 kg	2.1 m	70 hp
TD2024	20	1,800 kg	2.3 m	75 hp
TD2224	22	1,900 kg	2.5 m	80 hp
TD2424	24	2,000 kg	2.7 m	85 hp
TD2624	26	2,100 kg	2.9 m	90 hp
TD2824	28	2,200 kg	3.2 m	95 hp



## Jarrett Implements Pty Ltd

(ABN 81 000 582 918)

244 New Line Road, DURAL NSW 2158 Australian tel: 02 9651 2166 fax: 02 9651 3069

International tel: +61 2 9651 2166 International fax: +61 2 9651 3069

Email: [support@jarrett.net.au](mailto:support@jarrett.net.au)

Sold and serviced by:

# JARRETT JT SERIES TRAILING DISC CULTIVATOR \*



The JT2426 (24 disc) trailing disc cultivator (rear view)



The JT2426 (24 disc) trailing disc cultivator (front view)

## Main features


- Robust design with built-in weight
- Cast disc spacers to add weight
- Frame construction: RHS 150x100x9mm
- Frame length: 4.36m
- 38mm square, 1040 grade steel axles
- 2 x 15x7 steel wheel rims
- 2 x 9.5x15 multi-rib, agricultural tyres
- Hydraulic levelling kit
- Wheel lift hydraulic cylinder: 300x75mm Alford Blackline with hoses

## Gang assembly

- Frame beams: RHS 100x100x9mm
- Discs: 660x6mm, scalloped
- Spacers: 235mm, 1-piece cast, machined ends
- Self-aligning, triple sealed ball bearings, mounted inside a spherically machined cast housing
- Trash scrapers: 50x16mm flat bar and 75x75x10mm angle bar

## Options

- Dual wheel kit (to give a total of 4 std wheels)
- 710x6mm scalloped discs
- Hydraulic pitch control kit
- Extension filler disc

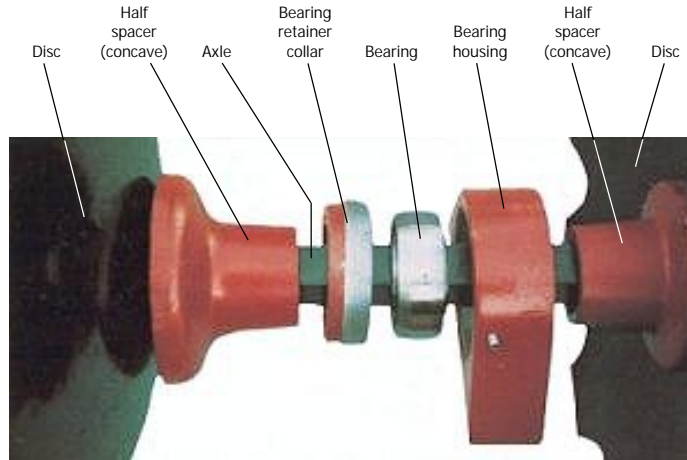

Exploded view of disc cultivator bearings

## Specifications

Model	Discs	Weight	Cut	Min pwr range
JT2426	24	2,500 kg	2.75 m	90-110 hp
JT2826	28	3,000 kg	3.20 m	110-130 hp
JT3226	32	3,500 kg	3.65 m	130-150 hp
JT3626	36	4,000 kg	4.10 m	150-170 hp



## Jarrett Implements Pty Ltd

(ABN 81 000 582 918)

244 New Line Road, DURAL NSW 2158 Australian tel: 02 9651 2166 fax: 02 9651 3069

International tel: +61 2 9651 2166 International fax: +61 2 9651 3069

Email: [support@jarrett.net.au](mailto:support@jarrett.net.au)

Sold and serviced by: